

#5  
Patent

Attorney's Docket No. 027557-081

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of )  
Hans CAVANDER et al. ) Group Art Unit: 2613  
Application No.: 09/993,569 ) Examiner: Unassigned  
Filed: November 27, 2001 )  
For: MOBILE COMMUNICATIONS )  
DEVICE )

RECEIVED  
MAY 13 2002  
Technology Center 2600

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

United Kingdom Patent Application No. 0028870.4


Filed: November 27, 2000

In support of this claim, enclosed is a certified copy of said prior foreign application. Said prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: May 9, 2002

By:   
Kenneth B. Leffler  
Registration No. 36,075

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(703) 836-6620

**This Page Blank (uspto)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

RECEIVED

MAY 13 2002

Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Signed

Dated 8 November 2001.

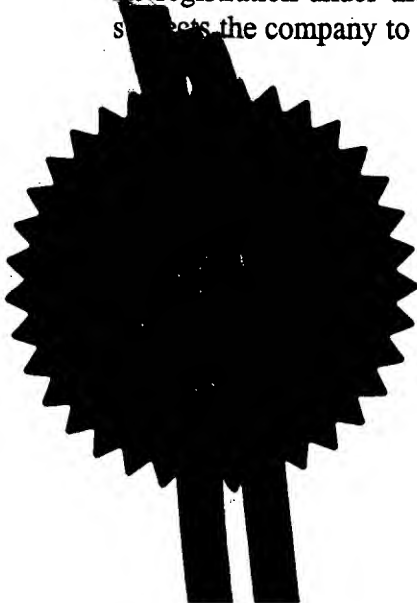

**This Page Blank (uspto)**

Patents Form 1/77

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

28NOV00 E587016-10028870.4  
P01/7700 0.00-0028870.4

Newport  
Gwent NP9 1RH

1. Your reference HL76409/000/DCO

2. Patent application number  
(The Patent Office will fill in this part)

0028870.4

27 NOV 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

TELEFONAKTIEBOLAGET L M ERICSSON (publ)  
SE-126 25 Stockholm  
Sweden

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Sweden

763748001  
763730003

4. Title of the invention  
MOBILE COMMUNICATIONS DEVICE

5. Full name of your agent (if you have one)

Haseltine Lake & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House  
15-19 Kingsway  
London WC2B 6UD

34001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to a grant of patent required in support of this request? (Answer "Yes" if:

YES

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form	-
Description	10
Claim(s)	3
Abstract	1
Drawing(s)	3+3

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to a grant of patent ( <i>Patents Form 7/77</i> )	-
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	1
Request for substantive examination ( <i>Patents Form 10/77</i> )	-
Any other documents ( <i>please specify</i> )	-

11.

I/We request the grant of a patent on the basis of this application

Signature

*Haselbacher*

Date

24<sup>th</sup> November 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. D. C. O'Connell

[0117] 9103200

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

MOBILE COMMUNICATIONS DEVICE

TECHNICAL FIELD OF THE INVENTION

5 This invention relates to a mobile communications device, and in particular to a device for use in a spread spectrum communication system.

BACKGROUND OF THE INVENTION

10 In a Wideband Code Division Multiple Access (W-CDMA) cellular radio telecommunications system, for example as used in so-called 3rd Generation mobile communications systems, a mobile station (MS) is able to move around an area in which multiple cells are defined. Each cell is served by a base station. The base stations use the same carrier frequency for their transmissions, and so these transmissions are  
15 identified by means of code signals which are transmitted by the base stations.

In order to establish a connection with a base station, a mobile station must go through an acquisition procedure. This requires that the mobile  
20 station be synchronised to the base station. This synchronisation is achieved by means of a matched filter. The maximum length of this filter is set by the frequency deviation which may exist between the base station and the mobile station, and so the length  
25 of the filter is restricted.

When the mobile station has established a connection with a base station, it must then continue to make measurements on signals received from other base stations. Again, the mobile station must  
30 synchronise to the other base stations before making these measurements. However, at this stage, the restricted length of the matched filter increases the time taken to synchronise to the base stations.

35 EP-0884856 describes a system of this type, in which the speed of acquisition is sought to be

increased by using multiple matched filters.

#### SUMMARY OF THE INVENTION

5 The present invention relates to a spread spectrum communications system, in which a mobile station includes a matched filter which can be divided into segments.

10 In a first synchronisation mode, when a frequency deviation is expected to be relatively large, the filter is used divided into segments. In a second synchronisation mode, when the frequency deviation is expected to be smaller, the filter is used undivided. Thus, in the first mode, a reduced filter length avoids difficulties caused by frequency deviation, while, in the second mode, an increased filter length allows  
15 faster acquisition.

The first synchronisation mode can be used when the receiver is initially establishing a connection to a base station, while the second synchronisation mode can be used after a connection has been established, when detecting transmissions from other base stations.  
20

According to another aspect of the invention, there is provided a method of controlling a receiver.

It should be emphasised that the term "comprises/comprising" when used in this specification  
25 is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

#### BRIEF DESCRIPTION OF DRAWINGS

30 Figure 1 is a schematic representation of a mobile communications network in accordance with the invention.

Figure 2 is a block schematic diagram of a mobile communications device in accordance with an aspect of  
35 the invention.



Figure 3 is a block schematic diagram of a matched filter in the mobile communications device shown in Figure 2.

5 Figure 4 is a flow chart showing a first synchronisation procedure in accordance with an aspect of the invention.

Figure 5 is a flow chart showing a second synchronisation procedure in accordance with an aspect of the invention.

10 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 shows a part of a cellular mobile communications network, operating in a Wideband Code Division Multiple Access (W-CDMA) system. Figure 1 shows just four cells C1-C4, although it will be realised that these represent only a small part of a typical network. Each of the cells C1-C4 includes a respective base station BS1-BS4. A typical mobile station (MS) 10 is also shown in the system. Again, it will be apparent that a real network will contain many such mobile stations.

20 Each base station BS transmits information to the mobile stations using the same nominal carrier frequency. These transmissions are spread using a Short Code. The mobile station is able to distinguish between the base stations because each base station also applies a respective Long Code to its transmissions. However, one part of each signal transmitted from a base station does not have the Long Code applied to it. This is the Long Code Masked symbol.

30 Although the invention is described herein with reference to a W-CDMA system, it will be apparent that it can be used in any system which uses a Long Code Masked symbol in this way, or, indeed, in any communication system in which a receiver must detect a

35

code in a received signal.

When a mobile station 100 is switched on, it must establish a connection with one of the base stations. This requires it to synchronise to the transmissions from the base station. Firstly, the mobile station must detect the slot timings of transmissions from the base station. This is done by detecting the correlation between the known short code and a received signal, using a matched filter. Then, the long code can be detected.

A somewhat similar process carries on when a base station has been acquired. After acquisition, the mobile station detects transmissions from other base stations, to aid in determining whether it should handover communications to one of the other base stations. Similarly, the mobile station must detect the slot timings of transmissions from the other base station, by detecting the correlation between the known short code and a received signal using a matched filter. This allows the long code of the other base station to be detected.

Figure 2 shows the relevant components of the mobile station 100. The invention is described herein with reference to a mobile phone, but it is generally applicable to portable radio communication equipment or mobile radio terminals, such as mobile telephones, pagers, communicators, electronic organisers, smartphones, personal digital assistants (PDAs), or the like. It will be apparent that Figure 2 shows only those components of the mobile station 100 which are essential to an understanding of the present invention.

An antenna 102 detects radio transmissions from a base station BS. Front-end receiver circuitry 104 receives signals from the antenna 102, and provides suitably filtered digital sample streams for the in-

phase (I) and quadrature (Q) components thereof. The sample streams representing the in-phase and quadrature components I, Q are passed to respective matched filters 106, 108. As discussed above, the matched filters 106, 108 detect the correlation between the known short code and the received signal components. Effectively, the filter slides over the signal stream received in a slot. Output filter values are supplied to an accumulator 110, which sums the output values. When it is determined that the accumulated value exceeds a threshold, it is determined that this filter position corresponds to the slot boundary. As will be described in more detail below, the operation of the matched filter is controlled by control circuitry of the mobile station.

The result of the determination by the accumulator 110 is passed to a block 112 which, by using the determined slot position, is able to detect the long code applied to the transmissions, and the result is then used in demodulating the received signal, as is known to the person skilled in the art.

Figure 3 shows the form of the matched filter 106 which receives the sampled in-phase signal (I), although it will be noted that the form of the matched filter 108 which receives the sampled quadrature signal (Q) is the same.

The filter 106 includes a shift register comprising 256 elements  $E_n$ , which is shown for convenience divided into four blocks, each having sixty-four elements, namely a first block 120 made up of elements  $E_0$ - $E_{63}$ , a second block 122 made up of elements  $E_{64}$ - $E_{127}$ , a third block 124 made up of elements  $E_{128}$ - $E_{191}$ , and a fourth block 126 made up of elements  $E_{192}$ - $E_{255}$ . Input received samples are applied to element  $E_{255}$  and, as further samples are received,

they in turn are applied to element E255, with previously received samples being shifted through the register. When 256 samples have been received, the first sample is in shift register element E0, while the most recently received sample is in shift register element E255.

At each stage, the value in each element  $E_n$  of the shift register is multiplied in a respective multiplier  $M_n$  by a corresponding coefficient  $C_n$ , which relates to a bit in the known short code discussed above. Thus, the value in element E255 of the shift register is multiplied in multiplier M255 by a coefficient C255, the value in element E254 of the shift register is multiplied in multiplier M254 by a coefficient C254, etc.

The outputs from the multipliers M0-M63 associated with the first block 120 of the shift register are summed in an adder 128, the outputs from the multipliers M64-M127 associated with the second block 122 of the shift register are summed in an adder 130, the outputs from the multipliers M128-M191 associated with the third block 124 of the shift register are summed in an adder 132, and the outputs from the multipliers M192-M255 associated with the fourth block 126 of the shift register are summed in an adder 134.

The outputs of each of the adders therefore represent the degree of correlation between the samples in the elements  $E_n$  of the corresponding shift register block, and the respective coefficient values  $C_n$ .

The outputs of the adders 128, 130, 132, 134 are connected to respective switches 136, 138, 140, 142 which can connect the respective adder outputs to respective alternative switch terminals A, B. The switch terminal A of each switch 136, 138, 140, 142 is connected to a respective block 144, 146, 148, 150,

which squares its received value to measure the power thereof. The switch terminal B of each switch 136, 138, 140, 142 is connected to an adder 152, and the outputs of the blocks 144, 146, 148, 150 are also connected to the adder 152.

The output of the adder 152 is connected to a further switch 154, having alternative switch terminals A, B. The switch terminal A of the switch 154 is connected to the output of the filter 106, and then to the accumulator 110 (Figure 2). The switch terminal B of the switch 154 is connected to a block 156 which squares its received value to measure the power thereof, and the output of the block 156 is also connected to the output of the filter 106, and then to the accumulator 110.

The operation of the filter 106, and the corresponding filter 108, will now be described in more detail with reference to Figures 4 and 5, which are flow charts illustrating the relevant parts of the synchronisation procedures carried out in the mobile station, under the control of control circuitry included in the mobile station.

Figure 4 shows the synchronisation carried out when the mobile station is switched on. Thus, in step 200, the acquisition procedure is started. In step 202, the switches 136, 138, 140, 142, 154 in the filter 106 shown in Figure 3 (and the corresponding switches in the filter 108) are set to their respective positions marked A. The reason for this will be explained below.

In step 204, based on the accumulated results from the filters 106, 108, the slot synchronisation position is determined. Then, in step 206, the long code of the base station is determined, these latter steps, and the subsequent steps which will not be described further,

being generally conventional.

Figure 5 shows the synchronisation carried out when the mobile station searches for transmissions from another base station. Thus, in step 220, the cell search procedure is started. In step 222, the switches 136, 138, 140, 142, 154 in the filter 106 shown in Figure 3 (and the corresponding switches in the filter 108) are set to their respective positions marked B. Again, the reason for this will be explained below.

In step 224, based on the accumulated results from the filters 106, 108, the slot synchronisation position is determined. Then, in step 226, the long code of the base station is determined, these latter steps, and the subsequent steps which will not be described further, again being generally conventional.

When the mobile station is first switched on, there can be a relatively large frequency deviation, between the frequency at which the base station is transmitting, and the frequency at which the mobile station is expecting to receive transmissions, that is, the frequency at which samples are clocked through the shift register blocks 120, 122, 124, 126. This frequency deviation can for example be up to  $\pm 10$ ppm, that is up to about 20kHz if the carrier frequency is 2GHz. This frequency deviation results in a phase rotation in every sample of the received sample stream. Since the performance of the matched filter is degraded severely if the total phase rotation over the length of the matched filter is too high, this effectively sets an upper limit on the maximum length of filter that can be used.

In this embodiment of the invention, where the frequency deviation can for example be up to  $\pm 10$ ppm, the maximum filter length is set at 64 elements. Thus, with the switches 136, 138, 140, 142, 154 at the

positions A, the four blocks 120, 122, 124, 126 effectively act as four separate filters, each with 64 elements.

5 In this case, assuming that each of the four blocks 120, 122, 124, 126 produces a correlation amplitude value X, when these are squared in the blocks 144, 146, 148, 150, and summed in the adder 152, the output accumulation value is  $4X^2$ .

10 When the mobile station has established synchronisation with one base station, and is performing a cell search operation, as described in Figure 5, the frequency deviation should not exceed +/- 1ppm, because the crystal oscillator in the frequency generator of the mobile station can be suitably  
15 compensated. Therefore, during this phase of operation, the possible frequency deviation does not effectively set any upper limit on the maximum length of filter that can be used.

20 In this embodiment of the invention, the switches 136, 138, 140, 142, 154 are set at the positions B, and the four blocks 120, 122, 124, 126 effectively act as a single filter, with 256 elements.

25 In this case, assuming that each of the four blocks 120, 122, 124, 126 produces a correlation amplitude value X, when these are summed in the adder 152, and squared in the block 156, the output accumulation value is  $16X^2$ , compared with an output accumulation value of  $4X^2$  when the four blocks 120, 122, 124, 126 effectively act as four separate filters.  
30 There is a corresponding increase of 6dB in the signal-to-noise ratio of the output value.

35 If the slot boundary detection algorithm relies on accumulating the power from the matched filter until it reaches a threshold, then this increase in the output accumulation value allows the slot boundary to be found

considerably more quickly.

5        This means that slot synchronisation can be  
achieved more quickly, that there is reduced power  
consumption because the algorithm runs for a shorter  
period, and hence that the battery life of the mobile  
station can be extended.



CLAIMS

1. A spread spectrum communications receiver, comprising a matched filter for correlating a received sample sequence with a known sample sequence, the receiver having:

a first synchronisation mode, in which the filter is used divided into segments; and

a second synchronisation mode, in which the filter is used undivided.

2. A receiver as claimed in claim 1, wherein each segment provides a respective output accumulation value, the receiver comprising switch means, wherein the switch means:

in the first synchronisation mode, are in a first position in which the powers of the output accumulation values are added; and

in the second synchronisation mode, are in a second position in which the output accumulation values are summed, and the power of the summed output accumulation values is calculated.

3. A receiver, for use in a telecommunications system in which transmissions are sent from a plurality of base stations, the receiver comprising:

receiver circuitry, for detecting transmissions from base stations;

a filter, for detecting a correlation between detected transmissions from base stations and a known code, the filter including a plurality of filter segments; and

control circuitry, for switching the filter between a first synchronisation mode, in which the filter is used divided into segments, when a frequency deviation between a frequency of the transmissions and an expected frequency can be relatively large, and a second synchronisation mode, in which the filter is

used undivided, when the frequency deviation is limited.

4. A receiver as claimed in claim 3, wherein the control circuitry switches the filter into the first synchronisation mode when the receiver is first detecting transmissions from a base station to achieve synchronisation therewith, and into the second synchronisation mode when the receiver is synchronised with one base station and is detecting transmissions from an alternative base station.

5. A receiver as claimed in claim 3, for use in a CDMA telecommunications system, wherein the filter detects a correlation between Long Code Masked symbols transmitted from base stations and the known code.

6. A receiver as claimed in claim 3, 4 or 5, comprising means for detecting a power of a correlation between detected transmissions from base stations and a known code,

wherein, in the first synchronisation mode, the powers of the correlations of the filter segments are detected and added together to form an output value, and, in the second synchronisation mode, the correlations of the filter segments are added together and the power of the added correlations is detected, to form an output value.

7. A method of controlling a receiver, for use in a telecommunications system in which transmissions are sent from a plurality of base stations, the method comprising:

detecting transmissions from base stations;  
using a filter, for detecting a correlation between detected transmissions from base stations and a known code, the filter including a plurality of filter segments; and

switching the filter between a first

synchronisation mode, in which the filter is used divided into segments, when a frequency deviation between a frequency of the transmissions and an expected frequency can be relatively large, and a  
5 second synchronisation mode, in which the filter is used undivided, when the frequency deviation is limited.

8. A method as claimed in claim 7, comprising switching the filter into the first synchronisation  
10 mode when the receiver is first detecting transmissions from a base station to achieve synchronisation therewith, and into the second synchronisation mode when the receiver is synchronised with one base station and is detecting transmissions from an alternative base  
15 station.

9. A method as claimed in claim 7, for use in a CDMA telecommunications system, wherein the filter detects a correlation between Long Code Masked symbols transmitted from base stations and the known code.

20 10. A method as claimed in claim 7, 8 or 9, comprising, in the first synchronisation mode, detecting the powers of the correlations of the filter segments and adding them together to form an output value, and, in the second synchronisation mode, adding  
25 together the correlations of the filter segments and detecting the power of the added correlations, to form an output value.

11. A method as claimed in claim 10, further comprising detecting a synchronisation position of the  
30 transmissions based on the output value.

ABSTRACT

MOBILE COMMUNICATIONS DEVICE

5       The present invention relates to a spread spectrum communications system, in which a mobile station includes a matched filter which can be divided into segments.

10       On initial acquisition, when a frequency deviation between the expected receiving frequency of the mobile station and the transmitting frequency of the base station is expected to be relatively large, the device can operate in a first synchronisation mode, in which the filter is used divided into segments. On searching for alternative cells, when the frequency deviation is expected to be smaller, the device can operate in a  
15       second synchronisation mode, in which the filter is used undivided.

20       Thus, in the first mode, a reduced filter length avoids the difficulties caused by frequency deviation, while, in the second mode, an increased filter length allows faster acquisition.

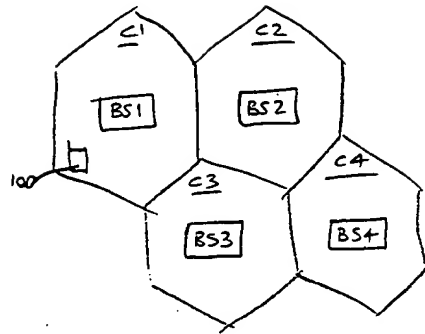


FIGURE 1

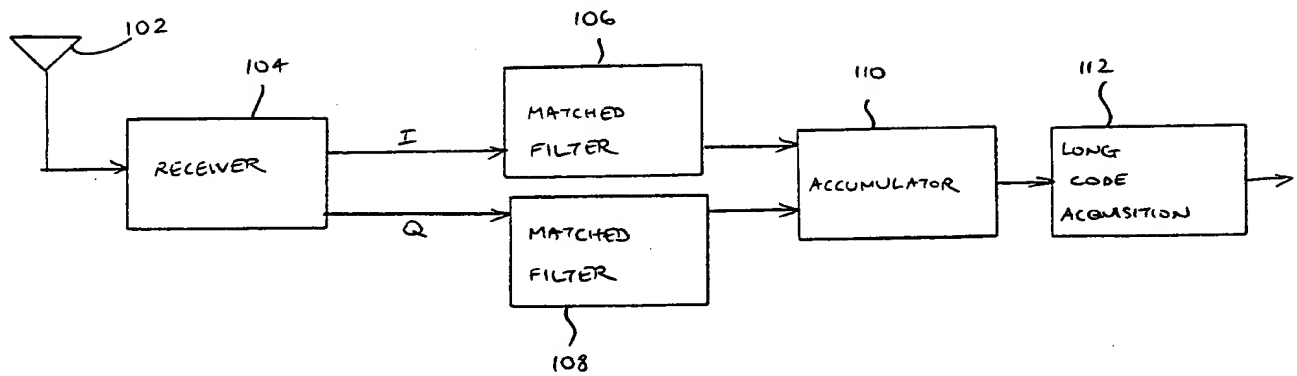


FIGURE 2

**This Page Blank (uspto)**

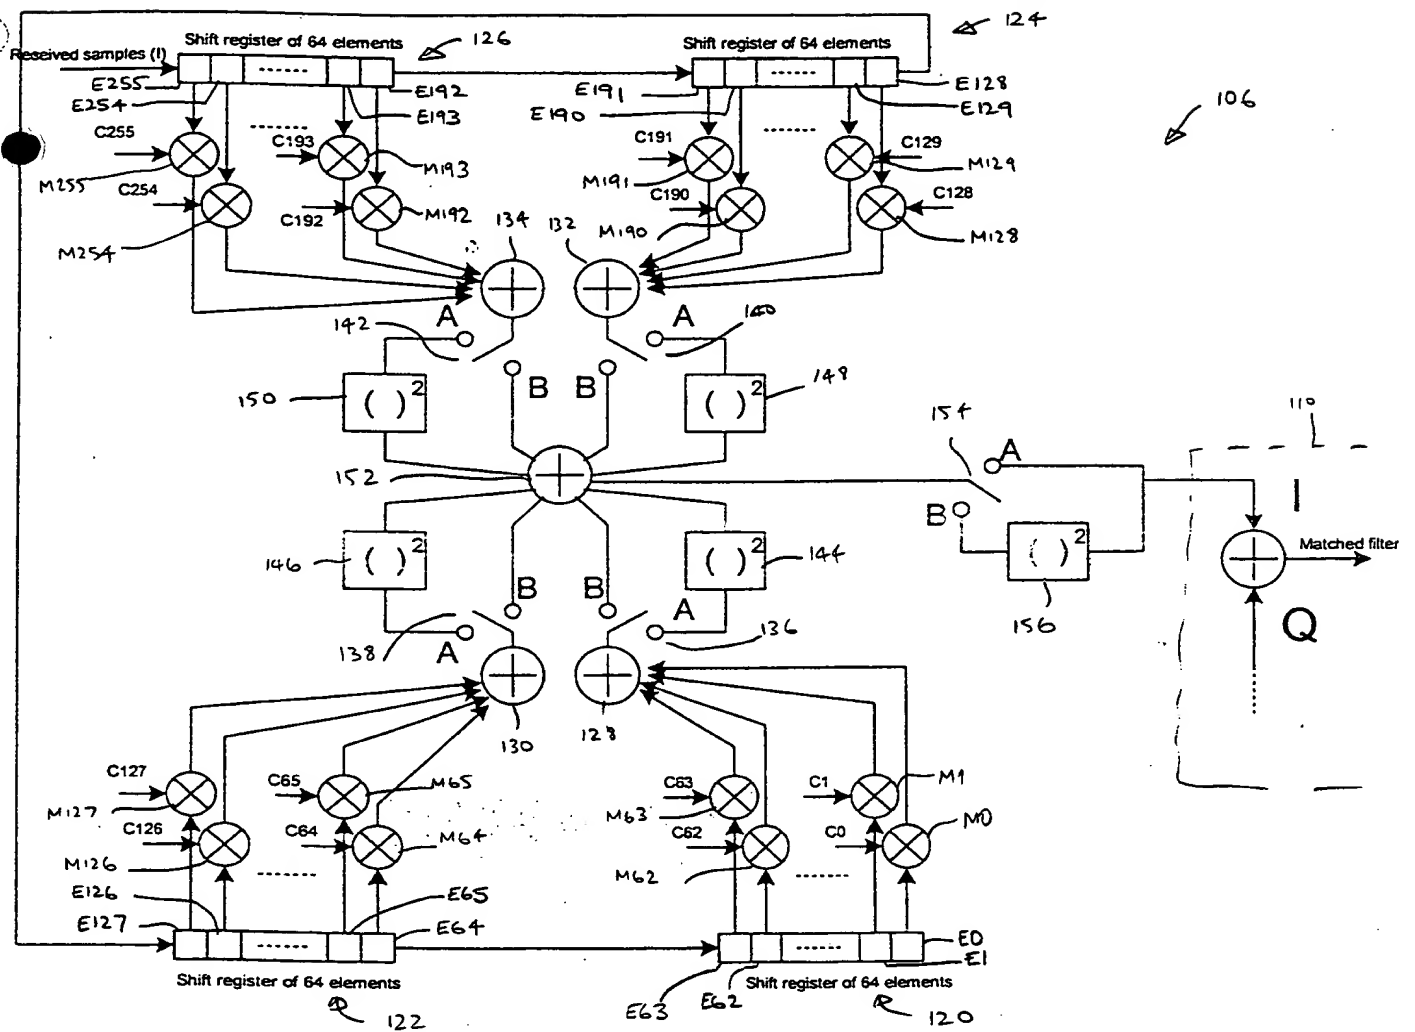


FIGURE 3

**This Page Blank (uspto)**



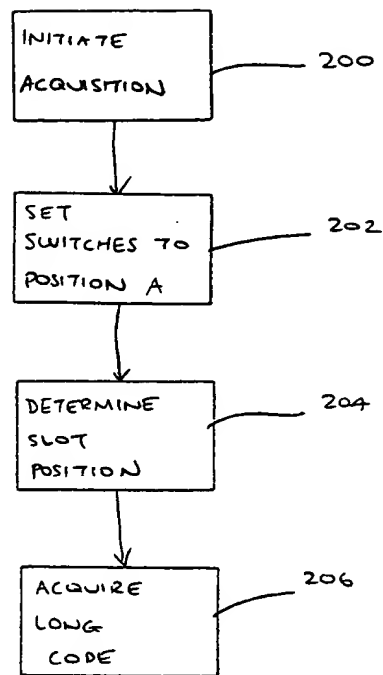


FIGURE 4

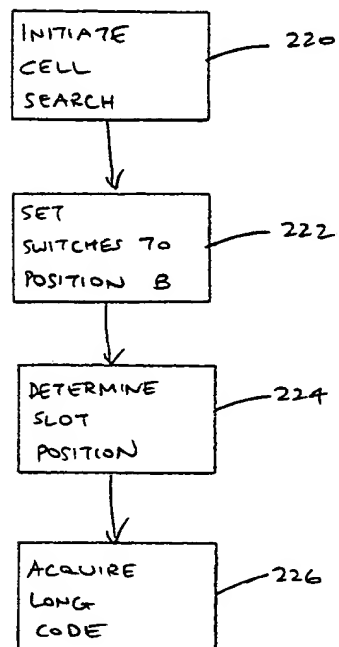


FIGURE 5

This Page Blank (usp10)